


# MOD 3000~9000TL3-X

- Max. efficiency 98.6%
- OLED and Touch button
- Type II SPD on DC and AC side
- String Monitoring
- AFCI optional

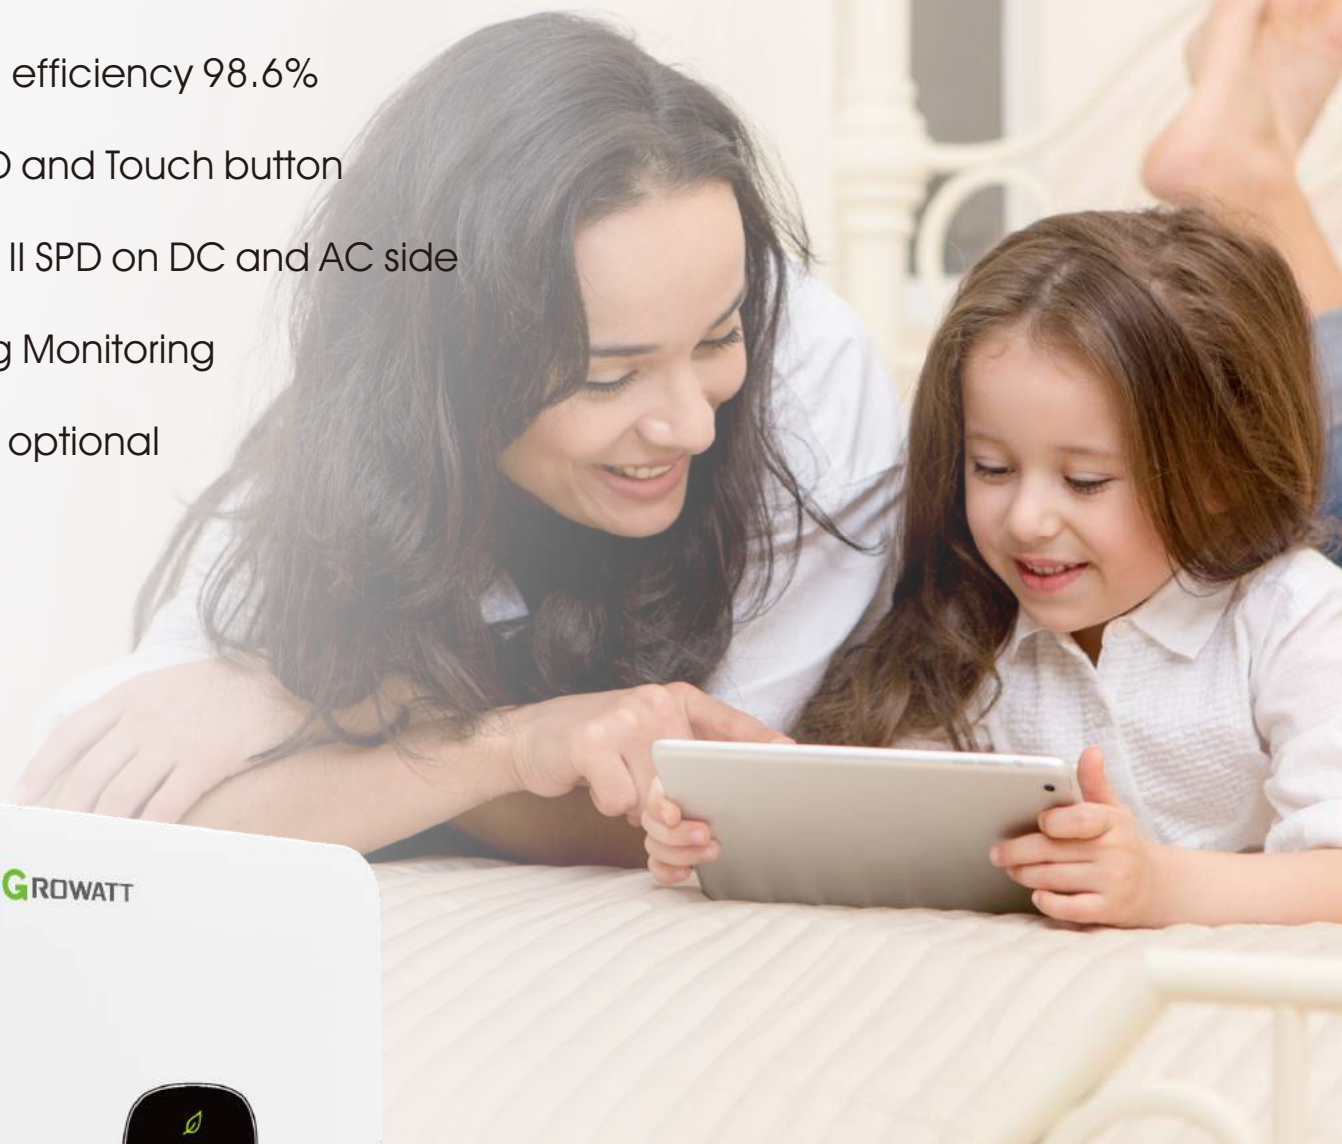

P O W E R  
- I N G O  
T O M O -  
R R O W O

**GROWATT**

[www.ginverter.com](http://www.ginverter.com)

Datasheet	MOD 3000TL3-X	MOD 4000TL3-X	MOD 5000TL3-X	MOD 6000TL3-X	MOD 7000TL3-X	MOD 8000TL3-X	MOD 9000TL3-X
<b>Input data (DC)</b>							
Max. recommended PV power (for module STC)	4500W	6000W	7500W	9000W	10500W	12000W	13500W
Max. DC voltage	1100V						
Start voltage	160V						
Nominal voltage	580V						
MPPT voltage range	140V-1000V						
No. of MPP trackers	2						
No. of PV strings per MPP tracker	1						
Max. input current per MPP tracker	13A						
Max. short-circuit current per MPP tracker	16A						
<b>Output data (AC)</b>							
AC nominal power	3000W	4000W	5000W	6000W	7000W	8000W	9000W
Max. AC apparent power	3300VA	4400VA	5500VA	6600VA	7700VA	8800VA	9900VA
Nominal AC voltage (range*)	220V/380V, 230V/400V (340-440V)						
AC grid frequency (range*)	50/60 Hz (45-55Hz/55-65 Hz)						
Max. output current	5.0A	6.7A	8.3A	10.0A	11.7A	13.3A	15.0A
Adjustable power factor	0.8leading...0.8lagging						
THDi	<3%						
AC grid connection type	3W+N+PE						
<b>Efficiency</b>							
MAX. efficiency	98.3%	98.3%	98.3%	98.3%	98.6%	98.6%	98.6%
European efficiency	97.5%	97.5%	97.5%	97.5%	98.1%	98.1%	98.1%
MPPT efficiency	99.9%						
<b>Protection devices</b>							
DC reverse polarity protection	Yes						
DC Switch	Yes						
AC/DC surge protection	Type II / Type II						
Insulation resistance monitoring	Yes						
AC short-circuit protection	Yes						
Ground fault monitoring	Yes						
Grid monitoring	Yes						
Anti-islanding protection	Yes						
Residual-current monitoring unit	Yes						
String fault monitoring	Yes						
AFCI protection	Optional						
<b>General data</b>							
Dimensions (W / H / D)	425/387/147mm	425/387/147mm	425/387/147mm	425/387/147mm	425/387/178mm	425/387/178mm	425/387/178mm
Weight	12.5kg	12.5kg	12.5kg	12.5kg	14kg	14kg	14kg
Operating temperature range	- 25°C ... +60°C						
Nighttime power consumption	< 1W						
Topology	Transformerless						
Cooling	Natural convection						
Protection degree	IP66						
Relative humidity	0–100%						
Altitude	4000m						
DC connection	H4/MC4(Optional)						
AC connection	Connector						
Display	OLED+LED/WIFI+APP						
Interfaces: USB/RS485/WIFI /GPRS/LAN/RF	yes/yes/Optional/Optional/Optional/Optional						
Warranty: 5 / 10 years	Yes/Optional						
CE, VDE0126, Greece, EN50549, C10/C11, UTE C 15-712, IEC62116, IEC61727, IEC 60068, IEC 61683, CEI0-21, N4105, TOR Erzeuger G98/G99, G100, AS4777, UNE21 7001, UNE206007, PO12.2							

\* The AC voltage range and frequency range may vary depending on specific country grid standard.  
All specifications are subject to change without notice.